


PaaSOS, Diseñando un nuevo módulo tuiRssReader (Parte X)

Centrémonos ahora en los informes y multivistas




Necesitaremos para las multivistas al menos dos procesos que carguen los históricos:

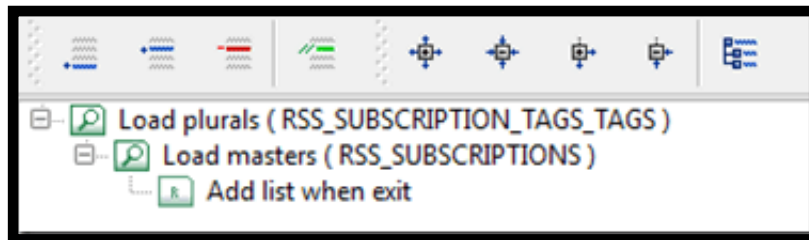

| | |
|-------------------|---------------------------|
| Source table | TAGS@tdbBase |
| Source | Record |
| Destination table | RSS_SUBSCRIPTIONS@tdbBase |
| Destination | List |

PRC_LOAD_RSS_SUBSCRIPTIONS_FROM_TAG

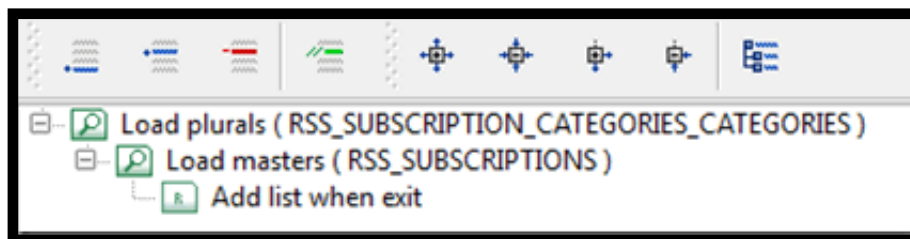

| | |
|-------------------|---------------------------|
| Source table | CATEGORIES@tdbBase |
| Source | Record |
| Destination table | RSS_SUBSCRIPTIONS@tdbBase |
| Destination | List |

PRC_LOAD_RSS_SUBSCRIPTIONS_FROM_CATEGORY

Seguimos con un primer informe:

| | |
|---------------|----------------------------------|
| Source table | RSS_SUBSCRIPTIONS@tdbBase |
| Default exit | Printer selection window |
| Logic printer | PRT_DIN_A4_VERTICAL@tuiResources |

RPT_RSS_SUBSCRIPTIONS

Creamos los objetos multivista:

| | |
|-----------------------|---|
| Source table | TAGS@tdbBase |
| Mode | MultiObject |
| Object 1 | GRD_TAGS@tuiBase |
| Synchronizing process | PRC_LOAD_RSS_SUBSCRIPTIONS_FROM_TAG@tuiRssf |
| Object 2 | GRD_RSS_SUBSCRIPTIONS@tuiRssReader |

MLV_RSS_SUBSCRIPTIONS_TAGS

| | |
|-----------------------|---|
| Source table | CATEGORIES@tdbBase |
| Mode | MultiObject |
| Object 1 | TRE_CATEGORIES@tuiBase |
| Synchronizing process | PRC_LOAD_RSS_SUBSCRIPTIONS_FROM_CATEGORY@ |
| Object 2 | GRD_RSS_SUBSCRIPTIONS@tuiRssReader |

MLV_RSS_SUBSCRIPTIONS_CATEGORY

| | |
|--------------|------------------------------------|
| Source table | RSS_SUBSCRIPTIONS@tdbBase |
| Mode | MultiObject |
| Object 1 | RPT_RSS_SUBSCRIPTIONS@tuiRssReader |

MLV_RPT_RSS_SUBSCRIPTIONS

| | |
|-----------------------|---|
| Source table | CATEGORIES@tdbBase |
| Mode | MultiObject |
| Object 1 | TRE_CATEGORIES@tuiBase |
| Synchronizing process | PRC_LOAD_RSS_SUBSCRIPTIONS_FROM_CATEGORY@ |
| Object 2 | RPT_RSS_SUBSCRIPTIONS@tuiRssReader |

MLV_RPT_RSS_SUBSCRIPTIONS_CATEGORY

| | |
|-----------------------|---|
| Source table | TAGS@tdbBase |
| Mode | MultiObject |
| Object 1 | GRD_TAGS@tuiBase |
| Synchronizing process | PRC_LOAD_RSS_SUBSCRIPTIONS_FROM_TAG@tuiRssf |
| Object 2 | RPT_RSS_SUBSCRIPTIONS@tuiRssReader |

MLV_RPT_RSS_SUBSCRIPTIONS_TAGS

Vamos a crear las acciones para estos nuevos objetos:

| | |
|---|---|
| ▶ | ACT_MLV_TAGS_RSS_SUBSCRIPTIONS |
| ▶ | ACT_MLV_CATEGORIES_RSS_SUBSCRIPTIONS |
| ▶ | ACT_RPT_PRN_RSS_SUBSCRIPTIONS |
| ▶ | ACT_RPT_PRV_RSS_SUBSCRIPTIONS |
| ▶ | ACT_RPT_PRV_RSS_SUBSCRIPTIONS_BY_CATEGORY |
| ▶ | ACT_RPT_PRV_RSS_SUBSCRIPTIONS_BY_TAG |

| | |
|----------|---------------------------------------|
| Object 1 | SQL_TAGS_ID@tuiBase |
| Object 2 | MLV_RSS_SUBSCRIPTIONS_TAGS@tuiRssRead |

ACT_MLV_TAGS_RSS_SUBSCRIPTIONS

| | |
|----------|---------------------------------------|
| Object 1 | SQL_CATEGORIES_ID@tuiBase |
| Object 2 | MLV_RSS_SUBSCRIPTIONS_CATEGORY@tuiRss |



ACT_MLV_CATEGORIES_RSS_SUBSCRIPTIONS

| | |
|----------|---------------------------------------|
| Object 1 | SQL_RSS_SUBSCRIPTIONS_ID@tuiRssReader |
| Object 2 | RPT_RSS_SUBSCRIPTIONS@tuiRssReader |



ACT_RPT_PRN_RSS_SUBSCRIPTIONS

| | |
|----------|--|
| Object 1 | SQL_RSS_SUBSCRIPTIONS_ID@tuiRssReader |
| Object 2 | MLV_RPT_RSS_SUBSCRIPTIONS@tuiRssReader |

ACT_RPT_PRV_RSS_SUBSCRIPTIONS

| | |
|----------|--|
| Object 1 |  SQL_CATEGORIES_ID@tuiBase |
| Object 2 |  MLV_RPT_RSS_SUBSCRIPTIONS_CATEGORY@t |

ACT_RPT_PRV_RSS_SUBSCRIPTIONS_BY_CATEGORY

| | |
|----------|--|
| Object 1 |  SQL_TAGS_ID@tuiBase |
| Object 2 |  MLV_RPT_RSS_SUBSCRIPTIONS_TAGS@tuiRss. |

ACT_RPT_PRV_RSS_SUBSCRIPTIONS_BY_TAG